- 32" MINIMUM OPENING WITH 6'-3" MINIMUM SWING CLEARANCE
- MOUNTING SUPPORT FOR BEHIND THE 3' X 3', 60LB CONTROL PANEL
- 12"WIDE X 6"HIGH HOLE THROUGH WALL AS CLOSE TO FLOOR AS POSSIBLE
- ALL APPROVALS, PERMITS, AND AGENCY SUBMITTALS
- WET ENVIRONMENT, DESIGN ROOM ACCORDINGLY, VENT 50CFM MINIMUM · HEATED WATER IN TANK AND PUMPS PRODUCE HEAT, VENT 50CFM MINIMUM

'LUMBING TO BE DONE BY OTHER:

- 12" X 12" RECESSED FLOOR DRAIN NEAR EQUIPMENT REQUIRED - 3" FLOOR DRAIN NEAR TREADMILL ENTRY - RECOMMENDED
- COLD AND HOT WATER SUPPLY WITH HOSE BIB, COLD FOR FILLING TANK (HEATED TANK) HOT FOR TOPPING OFF TANK ONLY AND CLEANUP

- 208V-240V | 1PH | 60HZ | 50AMP | 4 WIRE ELECTRICAL SUPPLY WITH A SIEMENS GFI 50-AMP SPA PANEL, MODEL # W0408L1125SPA50 (REQUIRED)


PURCHASED COMPONENTS:

- MOUNT CONTROL PANEL AND CONNECT INCOMING POWER PER NEC CODE - AFTER INSTALL BOND ALL EQUIPMENT PER NEC CODE

# **HUDSON SUPPLIED:**

- CUSTOM DESIGNED LAYOUT DRAWING WITH THE PURCHASE OF PRODUCT
- ON-SITE SERVICE TRAINING PROVIDED AFTER INSTALL
- ELECTRICAL CONNECTIONS FROM PANEL TO HEATER, PUMPS, MOTOR, & HMI
- PROPOSED PLUMBING PATH FROM TREADMILL TO EQUIPMENT

## 3 FT DRIVE SHAFT CLEARANCE AREA FOR TREADMILL SERVICE INSTALLATION OF PURCHASED COMPONENTS AS PER SIGNED DRAWING 0792001 TBD 0790573 0792000 0790364 - RESISTANCE JETS 0792002 - SIEMENS GFI 50-AMP SPA PANEL 2182578 **OPTIONS - NOT INCLUDED:** 500 GALLON TANK STAND AQUAFIT PLUS INSULATED TANK COVER - OZONE WATER SANITIZER 2 SHELF EQUIPMENT STAND 500 GALLON TANK w/RECIRC AQUAFIT

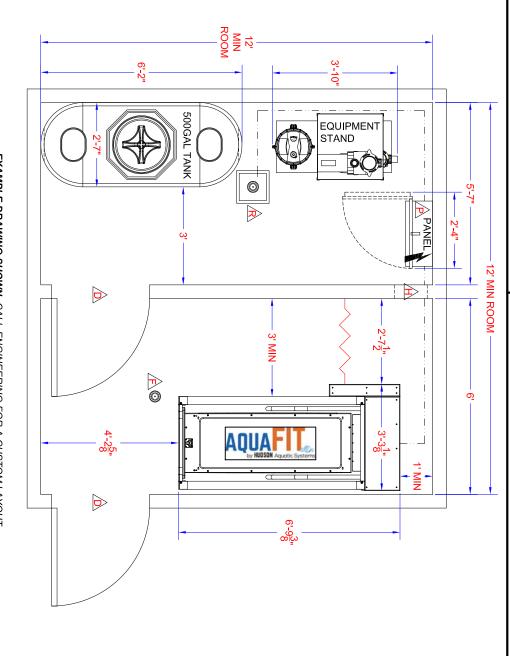

--- **EXAMPLE DRAWING SHOWN**, CALL ENGINEERING FOR A CUSTOM LAYOUT---

.00 WOHLERT ST | ANGOLA, IN 46703 HONE:1-800-939-3374 | ENG EXT: 222 AQUATIC SYSTEMS, LLC SDS

XXXXX XXXXX

3-10-16

X-XX

AQUAFIT SAMPLE LAYOUT DRAWING

DRAWN BY THIS DRAWING AND INFORMATION CONTAINED THEREON ARE CONFIDENTIAL AND THE PROPERTY OF HUDSON AQUATIC SYSTEMS, LLC. THEY ARE NOT TO BE REPRODUCED, DISTRIBUTED, DISCLOSED OR USED FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF HUDSON AQUATIC SYSTEMS. SALESMAN REV DATE: DRAWING # FACILTY NAME:

> APPROVED BY: PRODUCT TO BE BUILT AND INSTALLED AS SHOWN: --- FINAL SIGN OFF BLOCK

302 LBS PER SQ. FT

354 LBS PER SQ. FT

500G TANK & WATER FLOOR LOAD

TREADMILL & WATER FLOOR LOAD

FLOOR LOADS

500 GAL TANK & WATER WEIGHT

,500 LBS

500 GALLON TANK WEIGHT

5,400 LBS

TREADMILL & WATER WEIGHT

TREADMILL WEIGHT

1,250 LBS

WEIGHTS

215 LBS