

**CONSTRUCTION TO BE DONE BY OTHER:**

- 34-5/8" MINIMUM OPENING WITH 84" MINIMUM SWING CLEARANCE
  - MAKE SURE THE ELECTRICAL WALL RECEPTACLE IS WITHIN 10FT OF PROPOSED THE CONTROL PANEL LOCATION SHOWN ON DRAWING.
  - 9" MINIMUM CEILING REQUIRED ABOVE WATER TANK ONLY
  - ALL APPROVALS, PERMITS, AND AGENCY SUBMITTALS
  - WET ENVIRONMENT, DESIGN ROOM ACCORDINGLY, VENT 50CFM MINIMUM
- PLUMBING TO BE DONE BY OTHER:**
- 3" FLOOR DRAIN NEAR TREADMILL EQUIPMENT - REQUIRED
  - 3" FLOOR DRAIN NEAR TREADMILL ENTRY - RECOMMENDED
  - COLD AND HOT WATER SUPPLY WITH HOSE BIB, COLD FOR FILLING TANK (HEATED TANK) HOT FOR TOPPING OFF TANK ONLY AND CLEANUP

**ELECTRICAL TO BE DONE BY OTHER:**

- 230V | 1PH | 60HZ | LEVITON 279, 50AMP | NEMA 14-50R, 3 POLE, 4 WIRE
- FLUSH MOUNTING RECEPTACLE, STRAIGHT BLADE, INDUSTRIAL GRADE, GROUNDING, SIDE WIRED, STEEL STRAP, BLACK IS IN PLACE (MUST USE ALL 4 WIRES), CONNECT TO DESIGNATED CIRCUIT A SIEMENS GFI 50-AMP SPA PANEL, **MODEL # W0408L112SSPA50 (REQUIRED)**

**HUDSON SUPPLIED:**


- CUSTOM DESIGNED LAYOUT DRAWING WITH THE PURCHASE OF PRODUCT
- PROPOSED PLUMBING PATH FROM TREADMILL TO EQUIPMENT
- DOES **NOT INCLUDE** INSTALLATION OR ON-SITE INSERVICE, BUT (OPTIONAL)

**PURCHASED COMPONENTS:**

- 0790101
- AQUAPAWS JR
- 250 GALLON TANK w/RECIRC.
- 250 GALLON TANK STAND

**OPTIONS - NOT INCLUDED:**

- 2182578
- SIEMENS GFI 50-AMP SPA PANEL
- TBD
- WALL RECEPTACLE
- 0790104
- 4 PACK JETS
- 0790208
- THERAPY BENCH
- 0790969
- ENTRY STEP (REMOVABLE)
- 0790364
- OZONE WATER SANITIZER
- 0790950
- UV WATER SANITIZER
- TBD
- INSULATED TANK COVER
- CALL FOR QUOTE
- INSTALLATION & INSERVICE

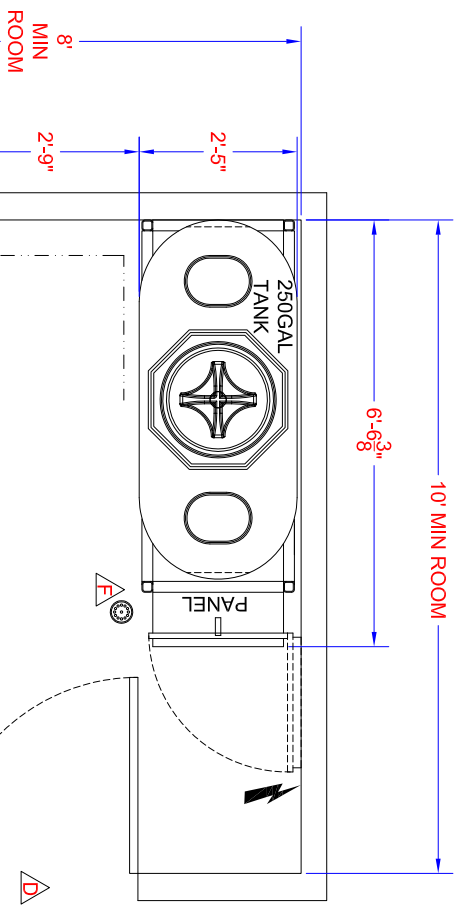

--- EXAMPLE DRAWING SHOWN, CALL ENGINEERING FOR A CUSTOM LAYOUT ---

THIS DRAWING AND INFORMATION CONTAINED THEREON ARE CONFIDENTIAL AND THE PROPERTY OF HUDSON AQUATIC SYSTEMS, LLC. THEY ARE NOT TO BE REPRODUCED, DISTRIBUTED, DISCLOSED OR USED FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF HUDSON AQUATIC SYSTEMS.

**HUDSON**  
AQUATIC SYSTEMS, LLC  
1100 WOHLERT ST | ANGOLA, IN 46703  
PHONE: 1-800-939-3374 | ENG EXT: 222

DRAWN BY:	SALESMAN:	REV. DATE:	DRAWING #:	FACILITY NAME:
SDS	XXXXX XXXXX	3-21-16	XX-XXXX	AQUAPAWS SAMPLE LAYOUT DRAWING

<b>FLOOR LOADS:</b>
TREADMILL & WATER
258 LBS PER SQ. FT.
250 GAL TANK & PUMPS & WATER
171 LBS PER SQ. FT.
<b>WEIGHTS:</b>
TREADMILL EMPTY
800 LBS
TREADMILL FULL
2920 LBS
250 GAL TANK & PUMPS EMPTY
600 LBS
250 GAL TANK & PUMPS FULL
2684 LBS

----- **FINAL SIGN OFF BLOCK** -----  
PRODUCT TO BE BUILT AND INSTALLED AS SHOWN:  
APPROVED BY: \_\_\_\_\_  
DATE: \_\_\_\_\_