


CONSTRUCTION TO BE DONE BY FACILITY:

- ALL DOORS FROM ENTRY AND PATH OF TRAVEL TO INSTALL AREA MUST BE UNHINGED LEAVING A CLEAR UNOBSTRUCTED 34-5/8" MINIMUM OPENING & A 43-1/2" MINIMUM HALLWAY SWING CLEARANCE FOR TREADMILL AND TANK
- MOUNTING SUPPORT BEHIND THE 3' X 3', 60LB TREADMILL CONTROL PANEL
- ALL APPROVALS, PERMITS, AND AGENCY SUBMITTALS
- WET ENVIRONMENT WITH SPLASHING, DESIGN ROOM ACCORDINGLY
- AIR VENT 50CFM MINIMUM IN EACH ROOM WHERE EQUIPMENT IS LOCATED
- FLOOR BELOW TREADMILL FOOT PRINT TO BE LEVEL WITHIN .5" OVER 8FT AND IF NOT LEVEL A MINIMUM PAD OF 30-1/2" x 94" TO SUPPORT 228 LBS PER SQ. FT.

PLUMBING TO BE DONE BY FACILITY:

- 3" FLOOR DRAIN NEAR TREADMILL ENTRY RECOMMENDED
- 12" X 12" RECESSED FLOOR DRAIN NEAR EQUIPMENT REQUIRED
- COLD WATER SUPPLY WITH HOSE BIB, FOR FILLING WATER STORAGE TANK
- HOT WATER WITH HOSE BIB FOR MAKEUP, TREADMILL & CARTRIDGE CLEANING

FACILITY LAYOUT:

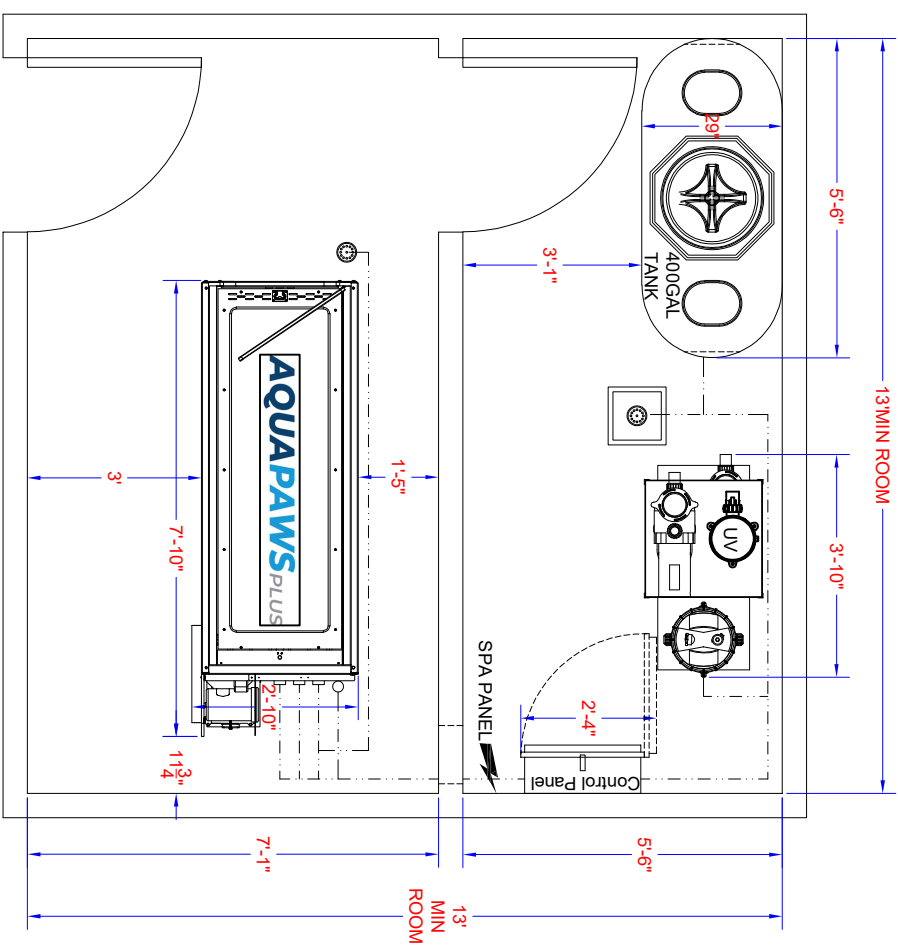

ELECTRICAL TO BE DONE BY FACILITY:

- 230V | 1PH | 60HZ | 50AMP | 4 WIRE ELECTRICAL SUPPLY WITH A SIEMENS GFI 50-AMP SPA PANEL, MODEL # W0408L1125SPA50 (REQUIRED)
- SPA PANEL MUST BE WITHIN 10FT OR LESS OF TREADMILL CONTROL PANEL
- EQUIPMENT WILL RUN BELOW 230VAC, BUT SHORTENS LIFE EXPECTANCY AND VOIDS WARRANTY (AN AQUABOOST TRANSFORMER P/N0789490 RAISES 20VAC)
- MOUNT CONTROL PANEL AND CONNECT INCOMING POWER PER NEC CODE
- AFTER INSTALL BOND ALL EQUIPMENT PER NEC CODE

HUDSON SUPPLIED:

- CUSTOM DESIGNED LAYOUT DRAWING WITH THE PURCHASE OF PRODUCT
- INSTALLATION OF PURCHASED ITEMS AS PER FINAL SIGNED DRAWING
- ON SITE IN-SERVICE TRAINING PROVIDED AFTER INSTALL
- ELECTRICAL CONNECTIONS FROM PANEL TO HEATER, PUMPS, MOTOR, & HMI
- "ASK SAM" WATER CARE SERVICE & AFTER HOURS SERVICE SUPPORT
- PROPOSED PLUMBING PATH FROM TREADMILL TO EQUIPMENT

PURCHASED ITEMS:

- 0792017 AQUAPAWs SS
- 400 GALLON TANK w/RECIRC.
- 0790688 400 GALLON TANK STAND

OPTIONS - NOT INCLUDED:

- 0792018 AQUAPAWs SS w//INCLINE
- 400 GALLON TANK w/RECIRC.
- 2182578 SIEMENS GFI 50-AMP SPA PANEL
- 0792021 4 PACK JETS
- 0790209 THERAPY BENCH

--- EXAMPLE DRAWING SHOWN. CALL ENGINEERING FOR A CUSTOM LAYOUT ---



100 WOHLETT ST | ANGOLA, IN 46703
 HOME: 1-800-939-5374 | ENG EXT: 222

| | | | | |
|------------------|--------------------------|----------------------|-----------------------|---|
| DRAWN BY: HJS | SALESMAN: XXXXX XXXXX | REV. DATE: 4-2-24 | DRAWING #: XX-XXXX | FACILITY NAME: AQUAPAWs PLUS SAMPLE (SPACE SAVER) LAYOUT DRAWING |
|------------------|--------------------------|----------------------|-----------------------|---|

--- FINAL DRAWING SIGN OFF ---
 PRODUCT TO BE BUILT AND INSTALLED AS SHOWN:
 APPROVED BY: _____
 DATE: _____

THIS DRAWING AND INFORMATION CONTAINED THEREON ARE CONFIDENTIAL AND THE PROPERTY OF HUDSON AQUATIC SYSTEMS, LLC. THEY ARE NOT TO BE REPRODUCED, DISTRIBUTED, DISCLOSED OR USED FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF HUDSON AQUATIC SYSTEMS.

| | |
|---------------------|-------------------------|
| 0790200 | 2 SHELF EQUIPMENT STAND |
| 0790007 | TREADMILL EMPTY |
| 620 LBS | |
| 0790007 | TREADMILL w/30" WATER |
| 3,446 LBS | |
| 0790007 | 400 GALLON TANK EMPTY |
| 200 LBS | |
| 0790007 | 400 GALLON TANK w/WATER |
| 3,534 LBS | |
| FLOOR LOADS: | |
| | TREADMILL w/30" WATER |
| | 228 LBS PER SQ. FT. |
| | 400 GALLON TANK w/WATER |
| | 354 LBS PER SQ. FT. |