- ALL DOORS FROM ENTRY AND PATH OF TRAVEL TO INSTALL AREA MUST BE

43-1/2" MINIMUM HALLWAY SWING CLEARANCE FOR TREADMILL AND TANK UNHINGED LEAVING A CLEAR UNOBSTRUCTED 34-5/8" MINIMUM OPENING & A

- WET ENVIRONMENT WITH SPLASHING, DESIGN ROOM ACCORDINGLY ALL APPROVALS, PERMITS, AND AGENCY SUBMITTALS - MOUNTING SUPPORT BEHIND THE 3' X 3', 60LB TREADMILL CONTROL PANEL

- EQUIPMENT WILL RUN BELOW 230VAC, BUT SHORTENS LIFE EXPECTANCY AND

- 230V | 1PH | 60HZ | 50AMP | 4 WIRE ELECTRICAL SUPPLY WITH A

SIEMENS GFI 50-AMP SPA PANEL, MODEL # W0408L1125SPA50 (REQUIRED) SPA PANEL MUST BE WITHIN 10FT OR LESS OF TREADMILL CONTROL PANEI

VOIDS WARRANTY (AN AQUABOOST TRANSFORMER P/N0789490 RAISES 20VAC)

400 GALLON TANK STAND

OPTIONS - NOT INCLUDED

0792018

0790568

400 GALLON TANK w/RECIRC

AQUAPAWS SS

PURCHASED ITEMS:

- MOUNT CONTROL PANEL AND CONNECT INCOMING POWER PER NEC CODE

AFTER INSTALL BOND ALL EQUIPMENT PER NEC CODE

D

- AIR VENT 50CFM MINIMUM IN EACH ROOM WHERE EQUIPMENT IS LOCATED - FLOOR BELOW TREADMILL FOOT PRINT TO BE LEVEL WITHIN .5" OVER 8FT AND
- IF NOT LEVEL A MINIMUM PAD OF 30-1/2" x 94" TO SUPPORT 228 LBS PER SQ. FT.
- PLUMBING TO BE DONE BY FACILITY:

- 3" FLOOR DRAIN NEAR TREADMILL ENTRY RECOMMENDED
- INSTALLATION OF PURCHASED ITEMS AS PER FINAL SIGNED DRAWING - ON SITE IN-SERVICE TRAINING PROVIDED AFTER INSTALL

- CUSTOM DESIGNED LAYOUT DRAWING WITH THE PURCHASE OF PRODUCT

- ELECTRICAL CONNECTIONS FROM PANEL TO HEATER, PUMPS, MOTOR, & HMI

0792021

2182578

SIEMENS GFI 50-AMP SPA PANEI

400 GALLON TANK w/RECIRC AQUAPAWS SS w/INCLINE

4 PACK JETS

0790209

THERAPY BENCH

0790364-A


OZONE WATER SANITIZER

0790950-A

UV WATER SANITIZER w/30' CORD

- "ASK SAM" WATER CARE SERVICE & AFTER HOURS SERVICE SUPPORT
- COLD WATER SUPPLY WITH HOSE BIB, FOR FILLING WATER STORAGE TANK - 12" X 12" RECESSED FLOOR DRAIN NEAR EQUIPMENT REQUIRED PROPOSED PLUMBING PATH FROM TREADMILL TO EQUIPMENT
- HOT WATER WITH HOSE BIB FOR MAKEUP, TREADMILL & CARTRIDGE CLEANING 13'MIN ROOM

FACILITY LAYOUT:

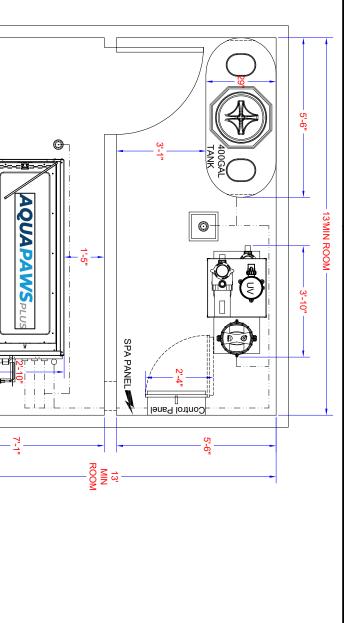



DRAWN BY:

1100 WOHLERT ST | ANGOLA, IN 46703 PHONE:1-800-939-3374 | ENG EXT: 222

SCH

XXXXX XXXXX

4-2-24 REV. DATE:

XX-XXX

SALESMAN:

--- EXAMPLE DRAWING SHOWN, CALL ENGINEERING FOR A CUSTOM LAYOUT ---

DRAWING #:

AQUAPAWS PLUS SAMPLE (SPACE SAVER STAND) LAYOUT DRAWING FACILITY NAME:

BE REPRODUCED, DISTRIBUTED, DISCLOSED OR USED FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF HUDSON AQUATIC SYSTEMS THIS DRAWING AND INFORMATION CONTAINED THEREON ARE CONFIDENTIAL AND THE PROPERTY OF HUDSON AQUATIC SYSTEMS, LLC. THEY ARE NOT TO

354 LBS PER SQ. FT

400 GALLON TANK w/WATER

TREADMILL w/30" WATER

FLOOR LOADS

228 LBS PER SQ. FT.

400 GALLON TANK EMPTY

TREADMILL w/30" WATER

3,446 LBS

620 LBS

TREADMILL EMPTY

VEIGHTS:

400 GALLON TANK w/WATER

0790200

1520909

00FT HMI CABLE UPGRADE

2810350

HAIR & DUST TREADMILL COVER

WATER TANK AQUA-FILL VALVE

0790007

2810401

INSULATED 400 GAL TANK COVER

2 SHELF EQUIPMENT STAND

APPROVED BY: PRODUCT TO BE BUILT AND INSTALLED AS SHOWN: