


**CONSTRUCTION TO BE DONE BY FACILITY:**

- △ - 32" MINIMUM OPENING, 6" MINIMUM HALLWAY SWING CLEARANCE
- △ - MOUNTING SUPPORT BEHIND THE 3' X 3', 60LB TREADMILL CONTROL PANEL
- △ - 12" WIDE X 6" HIGH HOLE THROUGH WALL AS CLOSE TO FLOOR AS POSSIBLE
- ALL APPROVALS, PERMITS, AND AGENCY SUBMITTALS
- WET ENVIRONMENT WITH SPLASHING, DESIGN ROOM ACCORDINGLY
- AIR VENT 50CFM MINIMUM IN EACH ROOM WHERE EQUIPMENT IS LOCATED
- FLOOR BELOW TREADMILL FOOT PRINT TO BE LEVEL WITHIN .5" PER 7FT

**PLUMBING TO BE DONE BY FACILITY:**

- △ - 3" FLOOR DRAIN NEAR TREADMILL ENTRY RECOMMENDED
- △ - 12" X 12" RECESSED FLOOR DRAIN NEAR EQUIPMENT REQUIRED
- COLD WATER SUPPLY WITH HOSE BIB, FOR FILLING WATER STORAGE TANK
- HOT WATER WITH HOSE BIB FOR MAKEUP, TREADMILL & CARTRIDGE CLEANING

**FACILITY LAYOUT:**

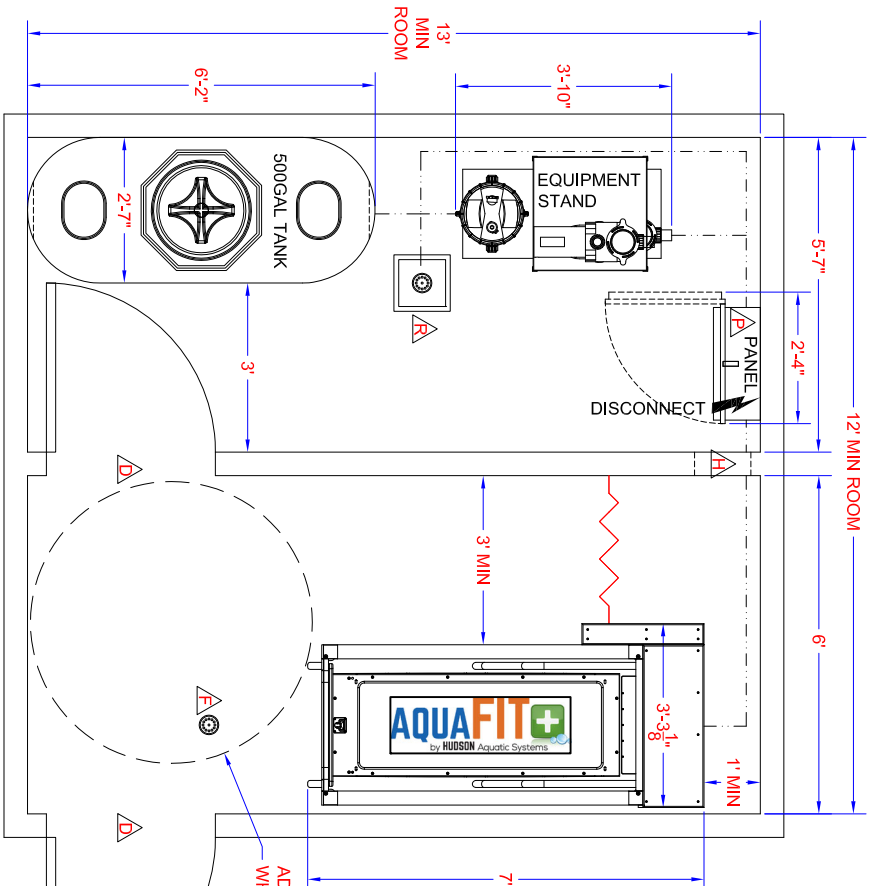

--- EXAMPLE DRAWING SHOW, CALL ENGINEERING FOR A CUSTOM LAYOUT ---

**ELECTRICAL TO BE DONE BY FACILITY:**

- 230V | 1PH | 60HZ | 50AMP | 4 WIRE ELECTRICAL SUPPLY WITH A SIEMENS GFI 50-AMP SPA PANEL, **MODEL # W0408L1125SPA50 (REQUIRED)**
- SPA PANEL MUST BE WITHIN 10FT OR LESS OF TREADMILL CONTROL PANEL
- EQUIPMENT WILL RUN BELOW 230VAC, BUT SHORTENS LIFE EXPECTANCY AND VOIDS WARRANTY (AN AQUABOOST TRANSFORMER P/N0789490 RAISES 20VAC)
- MOUNT CONTROL PANEL AND CONNECT INCOMING POWER PER NEC CODE
- AFTER INSTALL BOND ALL EQUIPMENT PER NEC CODE

**HUDSON SUPPLIED:**

- CUSTOM DESIGNED LAYOUT DRAWING WITH THE PURCHASE OF PRODUCT
- INSTALLATION OF PURCHASED ITEMS AS PER FINAL SIGNED DRAWING
- ON SITE IN-SERVICE TRAINING PROVIDED AFTER INSTALL
- ELECTRICAL CONNECTIONS FROM PANEL TO HEATER, PUMPS, MOTOR, & HMI
- "ASK SAW" WATER CARE SERVICE & AFTER HOURS SERVICE SUPPORT
- PROPOSED PLUMBING PATH FROM TREADMILL TO EQUIPMENT
- 3 FT DRIVE SHAFT CLEARANCE AREA FOR TREADMILL SERVICE

**PURCHASED SYSTEM:**

- 0792000-A AQUAFIT PLUS
- 500 GALLON TANK w/RECIRC. RESISTANCE JETS

**PURCHASED OPTIONS:**

- 0790200 2 SHELF EQUIPMENT STAND
- 0790802 EXTERIOR HAND RAILS AT ENTRY

**WEIGHTS:**

- TREADMILL EMPTY 1,250 LBS
- TREADMILL w/48" WATER 5,400 LBS
- 500 GALLON TANK EMPTY 215 LBS
- 500 GALLON TANK w/WATER 4,500 LBS

**FLOOR LOADS:**

- TREADMILL w/48" WATER 302 LBS PER SQ. FT.
- 500 GALLON TANK w/WATER 354 LBS PER SQ. FT.

THIS DRAWING AND INFORMATION CONTAINED THEREON ARE CONFIDENTIAL AND THE PROPERTY OF HUDSON AQUATIC SYSTEMS, LLC. THEY ARE NOT TO BE REPRODUCED, DISTRIBUTED, DISCLOSED OR USED FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF HUDSON AQUATIC SYSTEMS.

**HUDSON**  
AQUATIC SYSTEMS, LLC  
1700 WOHLEBERT ST | ANGOLA, IN 46703  
PHONE: 1-800-938-3374 | ENG EXT: 222

DRAWN BY: SDS	SALESMAN: XXXXX XXXXX	REV. DATE: 1-4-23	DRAWING #: XX-XXXX	FACILITY NAME: AQUAFIT PLUS w/OPTIONS (PACKAGE SAMPLE LAYOUT)
------------------	--------------------------	----------------------	-----------------------	--

APPROVED BY: \_\_\_\_\_  
DATE: \_\_\_\_\_  
--- FINAL DRAWING SIGN OFF ---  
PRODUCT TO BE BUILT AND INSTALLED AS SHOWN: